
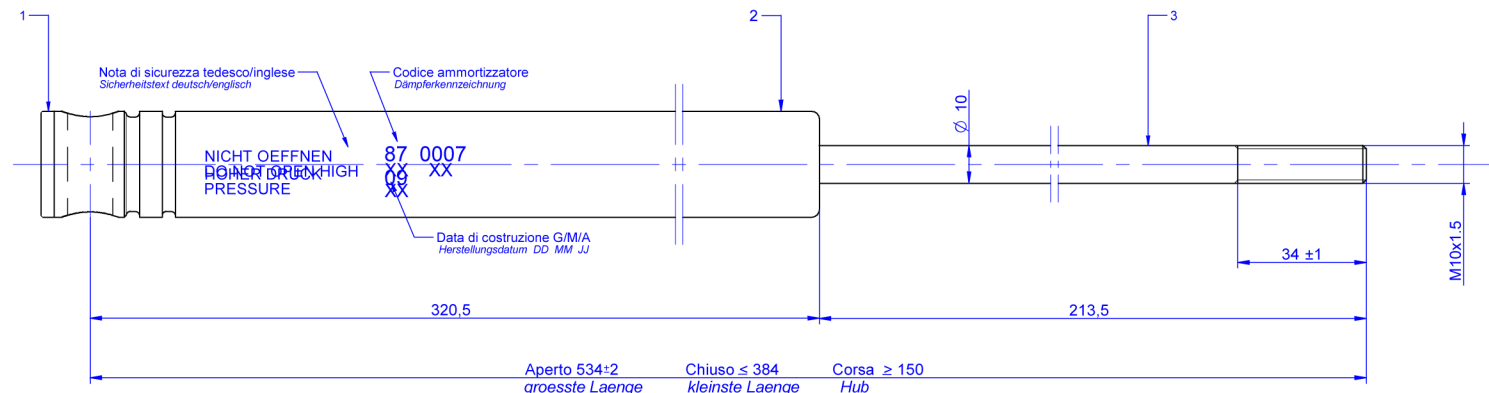


FINITURE SUPERFICIALI -

OBERFLÄCHENBEHANDLUNG

1	PP Moplen EP-T30M ROSSO	
2	Zincato Fe/Zn 8 cB (Bianco) - DIN 50961	
3	Nitrurazione SURSUF	 Nislide schwarz

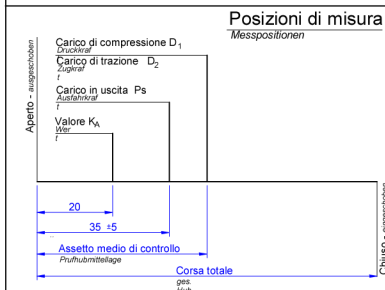

Corsa di controllo = 90mm Prüfhub		Assetto medio di controllo = 450±2mm Prüfmittellage	
Temperatura di controllo - Prüftemperatur		20±5°C	
Temperatura di lavoro Min/Max - Temperatur im Einsatz		Min/Max von -30°C bis +110°C	
Compressione Druckstufe	D ₁	530 ±90 N	v = 90mm/s ±10%
Estensione Zugstufe	D ₂	2100 ±330 N	v = 90mm/s ±10%
Compressione Ansprechschwelle	K _A	300 ±50 N	v = 12.5±2.5 mm/s
Carico in uscita Ausfahrkraft	Ps	150 ±30 N	ad interasse 495 mm

J.	10.06.2012	gb	Aggiunto "Temperatura di lavoro Min/Max".		
J.	10.05.2012	gb	Aggiornati: Interassi / Corsa / Peso / LOGO con		
www	08.06.2008	gb	Da 318/213,5 a 320/>210		
J.	02.01.2002	gb	Tolleranze originali per D1 - Ka - Ps - Aggiornamento grafica .		
1	03.05.2000	gb	Modificato tolleranze per D1 - Ka - Ps		1123
N.	Data - Datum	Sigla - Name	Descrizione Modifica - Beschreibung Änderung		Mod. N°
		Denominazione Benennung Amm.re idraulico monocamera a gas Hydr. gas Einzelrohrdämpfer			
Pianoro (Bologna)		Cliente - Kunde (G_A 750-1400 kg)		Finitura - Oberflächenbehandlung KF, KR, KV, KRV13, KR13/7-C, KV13HV-C, KR13/82	
Disegnatore - Zeichner		Rif. originale - Original-Nr.		Sostituisce il... - ersetzt	
Benizzi				Peso - Gewicht	
Visto - geprüft		Data - Datum		705	
		20.02.2000			
		Scala - Maßstab			
		1:1			
		A3			
					
				87 0007 13	